



PTC Condensate Evaporator	DUV 160		DUV 200	
	Operating Power max. (W)	135	160	165
Operating Voltage 50/60 Hz $\pm 10\%$ (V)	110	230	110	230
Evaporation rate max. (ml/h)	150	200	190	245
Capacity (ml)	350			
Dry run power consumption approx. (W)	52	56	52	56
Inrush current max. (A)	2,5	5,5	3,5	7,5
Operating temperature ($^{\circ}\text{C}$)	0 to +40			
Storage temperature ($^{\circ}\text{C}$)	-20 to +70			
Cable length (mm)	400			
Protection degree	IP 20			
Protection class	II			




FEATURES

- Compact PTC Condensate Evaporator with integrated tank for automatic collection and evaporation of condensate in enclosures and electrical cabinets
- Power from 135 to 200W
- Can be operated at 110V or 230V
- Evaporation rate up to 245ml/h
- High safety and energy efficiency thanks to the PTC effect
- Compact, encapsulated design
- Maintenance-free, no draining necessary
- Enclosed housing with integrated condensate collection tank
- Easy installation through hose connection, mounting brackets, DIN clip

TO PRODUCT

DRAWING

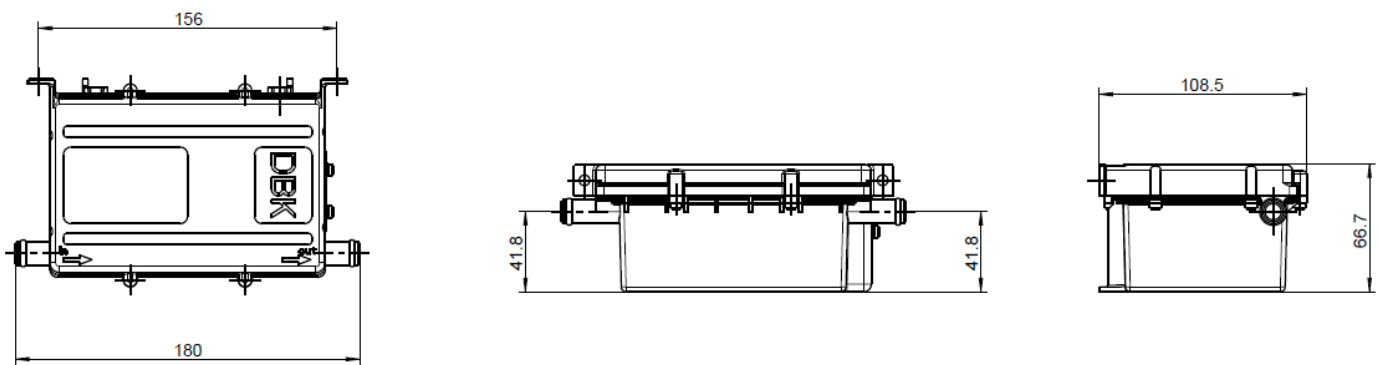

PTC Condensate Evaporator

APPLICATIONS

- Evaporator in enclosures and electrical cabinets
- Evaporator in refrigerated counters, freezers and air conditioners
- Air conditioners, Air-conditioned cabinets

